

DELTA®-FASSADE COLOR

Reliable protection against wind and moisture – and an attractive design to boot





European fire class

B

flame-resistant
to EN 13501-1

DELTA®-FASSADE COLOR

A versatile solution with coloured surface

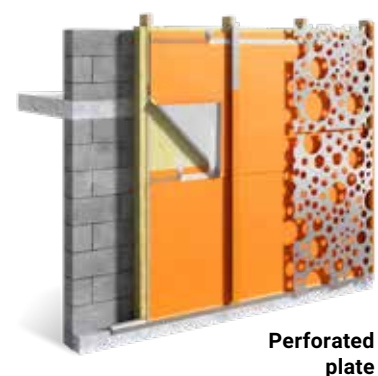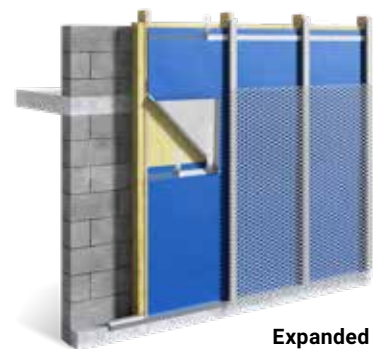

DELTA®-FASSADE COLOR – the essentials in brief

Material	Highly tear-resistant polyester fabric with watertight synthetic coating and adhesive zones on both edges
Suitability	Coloured, breathable façade membrane for cladding with joints up to 50 mm in width that make up a max. of 50 % of the surface area. The max. transmission of UV radiation through glass cladding must not exceed 10 %
Mass per unit area	approx. 300 g/m ²
Thickness	approx. 0.60 mm
Watertightness	Watertight W1
Tear strength	370/270 N/5 cm
Flammability class	European fire class B-s1,d0 (EN 13501-1); VKF RF2 (5.2) (VKF = Swiss Cantonal Fire Insurance Association)
S_d-value	approx. 0.02 m (high level of breathability)
Thermal stability	-40 °C to +120 °C
Roll weight	approx. 13.5 kg
Roll dimensions	30 m × 1.50 m
Available colours	

Accessories



DELTA®-
THAN



DELTA®-
FAS PAINT



DELTA®-
FAS CORNER



DELTA®-
FLEXX-BAND



DELTA®-
FAS BAND CLEAR

Advantages at a glance

- DELTA®-FASSADE COLOR meets specifications of the European fire class B-s1, d0. This is the highest class of flame-resistant sheets, which means the sheets do not drip and produce only low levels of smoke in the event of a fire.
- Offers the highest level of UV protection.
- Highly attractive and flexible thanks to seven standard colour tones: agate white, onyx black, pearl grey, topaz blue, emerald green, coral red, amber orange (further special colours on request).
- Colour-fast: Ensuring long-term colour fastness, the utilized inorganic pigments have been used in construction paints for decades.
- All-round moisture protection thanks to a special watertight coating and breathable DELTA®-AMS technology.
- Easy to lay thanks to adhesive zones on both edges.
- Extremely temperature- and weather-resistant.
- Thanks to the lotus effect beads of water run off particularly well, so rainwater can drain away extremely quickly.
- It is possible to combine façade claddings and colours in the online simulator to gain a first impression of their creative design effect:
www.fassade-color.com

DELTA®-FASSADE COLOR – permanently reliable safety:



Resistant to driving rain



Watertight



Facilitates windtight constructions



Highest level of UV protection



With lotus effect



Breathable – releases moisture



Long-term protection against ageing

flame-resistant



Dörken GmbH & Co. KG

Wetterstraße 58
58313 Herdecke

☎ +49 23 30/63-636

📠 +49 23 30/63-357

✉ bvf@doerken.de

🌐 www.doerken.com/int



A member of **DÖRKEN**GROUP



For further information material

visit our website and select Downloads



**To find the right contact
partners for sales and technology**

visit our website and select Contact



PEFC™ PEFC certified

This paper comes from sustainably managed forests and controlled sources